


MYLAR PAINT PROTECTOR MOUNTING INSTRUCTIONS

A mylar strip has been included with your lock for the purpose of protecting a painted mounting surface during keypad housing removal for battery replacement. **The mylar strip should be mounted at the same time as the mounting bracket is installed** (Step 3 of the LC Series Installation Guide.)

Mount the mylar strip as shown in the diagram below, placing it between the mounting surface and the mounting bracket. The tab portion of the strip should be positioned at about 5 o'clock in reference to the face of the keypad.

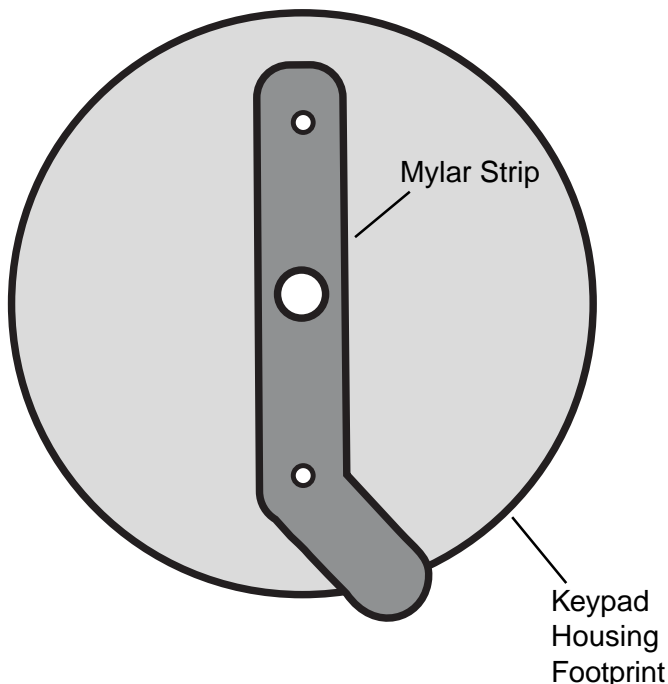

Kaba® Mas Corporation
749 W. Short Street, Lexington, KY 40508
Phone: (859) 253-4744 FAX: (859) 255-2655
Technical Support: (800) 950-4744
www.kaba-mas.com